

one or electron ic product willieneading the manual.

whenge is vited to the battery performance of the XO-PSA-1200. Please connect the Please fully

#IO-PSA-1200 for the first recharging.

To protect you and others from harm and the product from damage, please read

the manual carefully before using the product

- Do not expose the product to an extreme cold or hot environment
- (below-0°C or above40°C) for storage; • Do not place the product near the vent of a heating device;
- Please avoid putting the product in a rainy or wet environment; Please keep it away from flammable liquids, gases or explosive materials;
- Pleasekeep itawayfrom dust or a dusty environment; • Do not store the product with coins, jewelry, keys and other metal objects;
- otherwise, it will damage the product, reduce the charging capacity, shorten the service life, or even explode. The product should be stored in a cool and dry environment.
- 2.About Charger
- Do not use a deflective charger or a charger of mismatched output voltage;
- Please use the original charger, as incompatible or unqualified chargers may cause danger or damage the product;
- Do not use chargers without safety certification to charge the product. 3.Aboutstorage of leaving unused
- Please make sure to charge it at least once every 6 months to extend the life of the product (battery cells). When taking out the product after long-term
- storage, please fully charge it before use. When the product charger is not in use, the power must be disconnected at both ends. 4. About disposal of defective \old battery and charger
- Please dispose of scrapped products in accordance with regulations, and do not dispose the built-in batteries as domestic garbage to avoid explosion
- 5.Do not squeeze or pierce the product, and do not subject the product to high external pressure, otherwise it may cause internal short circuit, overheating, burning or explosion. 6.Do not place this product in the reach of people with low physiology,

perception, and mentality (including children)and people without

experience and related knowledge. Avoid the above people from using

this product to avoid misuse.

- 7.The product cannot be used as a substitute for the mains AC power supply in order to extend the cycle life of the battery cells. 1. Due to low power status during transportation, the residual power showing on 8.Do not paint or put up stickers on this product. Paint and stickers may
- block the equipment parts and affect normal use. 9. About the environment temperature for charging.
- Do notstore the product in hot orcold places, please usethe product in an environmentof0~60°C;

Do not store the product near or inside water heaters, microwave ovens, hot

- The temperature inside a closed carln summercan beas high as 80°C (putting the product in a car may put you or your car in danger,) Do not directly expose the product to sunlight for a long time, since when
- the heat dissipation is not started, the temperature of the battery cells will please turn it off immediately. (If the product cannot be turned off, please contact rise sharply. When charging the product, the operating temperature should the after sales service center immediately.) be between 0°C~40°C.
- cooking products, or high and low pressure parts, which may may cause overheating or cause fire.
- 10.About product cleaning
- Use a dry towel or eraser to wipe the product or charger. Do not use corrosive chemicals or cleaner.
- 11.Please do not disassemble, repair or modify the product, otherwise warranty will be invalid.

- charging and discharging for 2-3 times. 2. When using this product, please do not cover it with towels, clothing, etc., and make sure to keep more than 10cm of heat dissipation space around the XO-P5A-1200 3. Please keep the product and electrical products dry to prevent moisture and Adapter liquid from entering the product, otherwise it may damage the internal parts Manual
- Do not turn on the product when it is wet, if the product is already turned on, 4. Do not use the product in a very dusty environment, otherwise it may cause
- gasoline, gas, chemical agents, mines, etc., otherwise it may endanger safety Always operate in accordance with regulations, instructions and signs in potentially explosive environments. 6. Do not use the product in a corrosive environment, otherwise it will cause damagetothe product.
- and increase the risk of lightning strikes. 8. Please place the product on a flat surface to prevent the product from falling,
- 9. About recharging the product Please useXO original charger to charge the product
- Due to energy conversion during charging, this product may heat up. This is a
- 10. About the dischange of the product

5. Do not use the product in flammable and explosive environments such as

12 13

digital screen may be different from actual power, It will get normal after Please contact with XO service center if you have any question.



 When the power is 1 bar left or the indicator is flashing, to prolong the life of the battery, please immediately stop using and fully recharge XO-PSA-1200 before using

substances or elements in the product back together with the product. Toxic and hazardous substances or elements Lead mercury cadmium chromium Polybrominated biphenyls Polybrominated Diphenyl Ether

0:means that the content of the hazardous substance in all homogeneous materials of the component is below the limit requirement specified in the 2002/95/EC (ROHS) standard




• 12. Name and content of toxic and hazardous

0 0 0 0 0


Executive Producer:Threekey Industrial(HK) Co.,Ltd.
Manufacturer:Sanqi Youpin (Shenzhen) Co.,Ltd.
Add:Hongdehul Industrial Park,Kang Qiao Road No128,Buji,

Warranty card

Thankyou for your trust and support to our products. The warranty card is attached with each product. Please keep it properly as a product warranty certificate. If it is lost, it will not be replaced.

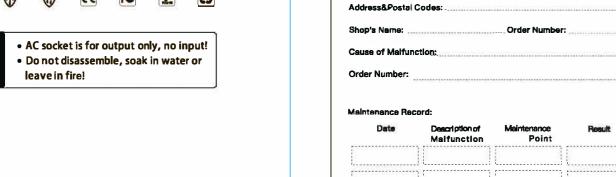

Please store the warranty card well and fulfill your information and send




• 2. Operation Cautions

orcircuits of the device.

productfailure, fire or explosion.

The contents will be different according to the needs of different regions.




7. Do not use the product during thunderstorms. The product may malfunction

otherwise it may damage the product or cause parts failure.


 Do notexceed the charging time of this product. Please unplug the charger when fully charged. It is recommended to charge during the day or when someone is present for easy inspection.

normal phenomenon. Please becare ful when handling.

3. Package contents





conversion technology. It is more durable and has longer cycle life than ordinary battery cell. It enjoys the reputation of "outdoor mobile power station". It is widely used in outdoor party and camping, household emergency, outdoor live broadcasting, mobile office, medical rescue, emergency rescue, power equipment repair, communication emergency and other fields. It is compatible with most of digital appliances and household appliance of power rate under 1200W.

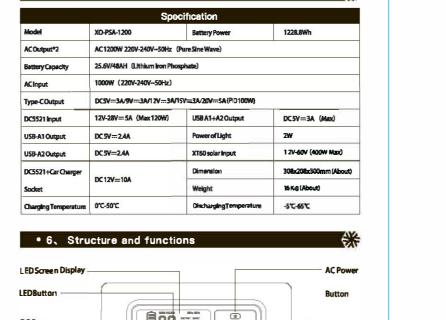


• 5、Specification

 4. Product Introduction DC Output DC1 XO-PSA-1200 is a multi-functional emergency energy storage power supply. It adopts UL authorized automobile power cell and efficient SPWM inverter Type-COutputC ___ 14 15

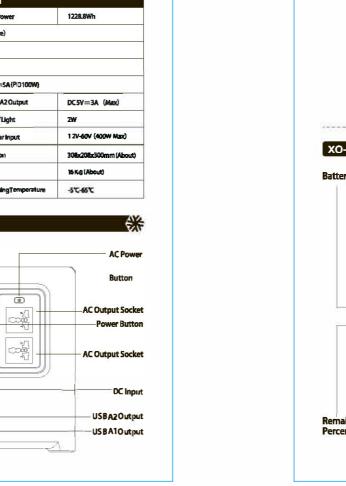

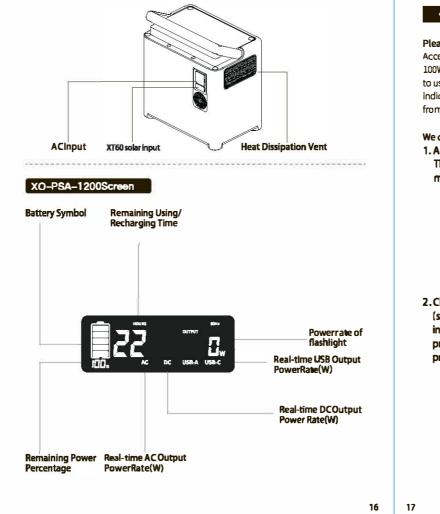

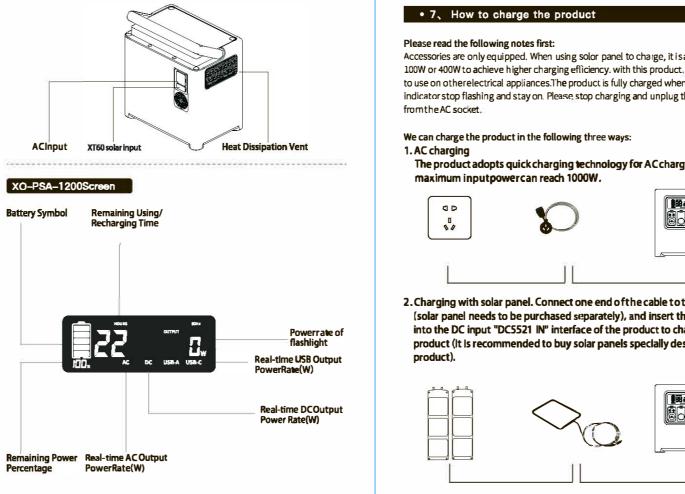



Please read the following notes first:


Accessories are only equipped. When using solor panel to charge, it is advised to use 100W or 400W to achieve higher charging efficiency, with this product, it is forbidden to use on other electrical appliances. The product is fully charged when the power indicator stop flashing and stay on. Please stop charging and unplug the power cord

The product adopts quick charging technology for ACcharging, and the

Please read following cautions before use: Please ensure that the input voltageand frequency of electrical equipment are consistent with the parameters of this product.



2. Charging with solar panel. Connect one end of the cable to the solar panel (solar panel needs to be purchased separately), and insert the other end into the DC input "DC5521 IN" interface of the product to charge the product (It is recommended to buy solar panels specially designed for this



the cigarette lighter and the other end to DC input "DC5521 IN" interface of the power station.

Please ensure that the rated power of electrical equipment is less than 1200W,

3-8 times of a certain rated power, and the starting power of energy-saving lampis

AC U 1200W AC Power Button

8. How to use the AC output

choose XO portable power supply with higher power.

preferably within 80% power range,

protection may be activated.

Steps of using the AC output

can beseen on LED screen.

3. Charge with a cable with car charger plug connect the car charger plug to

Step 3: Make sure the rated power of appliances is under 1200W. Step 4: Connect the appliance to the AC output.

ACOutput Socket Step 5: Tum itoffwith the AC button and pull out the appliance plugwhen stop using.

Step 6: Please recharge it if it is of low battery or out of battery.

Step 2: Check whether the input voltage and frequency is compatible with

To avoid powerloss, please turn it off with the AC button when you are not

- If the rated power of electrical equipment is higher than 1200W, the overload Since different countries have different plug type and voltage standards, to If the power of electrical equipment is higher than the rated power of 1200W, please
 - avoid danger, please carefully check if the appliance is compatible with the

• The AC output will be of fautomatically when there is no load more than 12 hours. The instantaneous power of some electrical equipment is greater than its rated • 9. How to use the DC output power. For example, the starting power of inductive load equipment is generally

When using DC output(Include USB-A output, DC output, Type-C PD 100W dozens of times of its rated power. The above situation does not rule out the output), please ensure that the digital device support the current of the possibility of activating the overload protection of this product and turning off the corresponding output port, so as to prevent the interface from overheating and causing damage to the device. 1. Use USB ports to charge digital devices 2 ways to use USB output:

> supporting OC3.0 protocol to connect power station and the digital devices. Long press the DC button and the power station will charge the digital devices quickly.

USB-A QC3.0: theorange USB-Acan provide QC3.0 quickcharge, it will need a cable

and the output power is 100W. It will need a cable supporting PD protocol to

connect power station and the digital devices. Long press the DC button and the power station will charge the digital devices quickly.

- 2. Use DC output to power appliances Longpress DC button, the DC indicator light will be on and two DC ports start to
- provide power at voltage 12V and total current 6A. Connect to the DC output to power appliances. Longpress the DC button again, the DC indicator will be off and the power will becut. This DC output can provide power to DC f.an and LED

When you are not using DC output, please turn it off with the DC button, otherwise the remaining power will be consumed by itself.

• 10 Steps to use flashlight

USB-C: USB-C output interface, also known as Type-C, can provide PD fast charging

The product has a built-in flashlight. 1. Strong LED reading light, short-press the switch to turn it on and switch

the modes of luminance: strong→soft→505



• Please don't use the flashlight directly point to eyes to avoid the damage

from strong light.

• 11、 After-sales services

- To ensure your legal right, please payattention to: 1. The warranty card must be sealed by the seller before it can take effect.
- 2. The warranty card shall be properly kept by the user. If it is lost or altered,

- 3. In case of any failure caused by non-human reasons, you can take the
- warranty card to the designated repair center for free repair within the warranty period.
- 4. Free maintenance service will be unavailable under the following circumstances even within the warranty period: You will no longer enjoy the warranty if you disassemble, refit or repair the product
- without permission; • Damage of surface coating and appearance is not within the scope of warranty;
- Failure caused byincorrect installation, packaging and usewhich is not in accordance with the requirements of the user manual:

20 21

- Failure or damage caused by accidental, man-made reasons or environmentand
- otherfactors (wrong operation, collision, unreasonable voltage, damp, etc.); • Failure ordamage caused byforce majeure likeearthquake, firedisaster, scunami
- Product packaging box and accessories are not within the scope of warranty If your product has expired the warranty period, we offer compensated repair service.