



FINGERRPINT CABINET LOCK

USER MANUAL

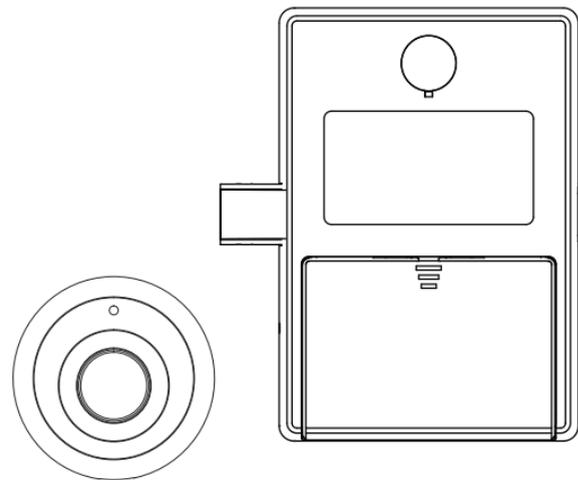

1.How to add new fingerprints

- Place your registered finger on the sensor. Waiting green light to come on for the third time then release your finger.
- Blue light is on, you can start recording your fingerprints.
- Repeat placing your finger on the sensor (blue and green lights flash alternately) until the green light stays on for 2 seconds(fingerprint registration is successful).
- The blue light is on again, the next fingerprint can be recorded.(If fingerprinting is not required, wait for the light to go out)

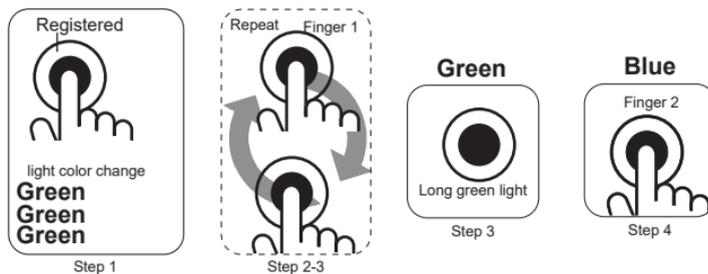


Note

- 1) Make sure add the fingerprint before using. Any finger can unlock in the factory setting.
- 2) In order to keep the lock work well, to add no less than 3 fingerprints.

2.Initialize

- 1) Method 1:
Place the registered fingerprint on the sensor until the red light flashes.

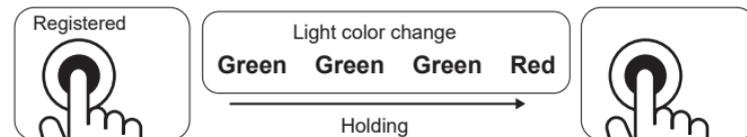

Feature

1. Biometric sensor, high sensitive and rapid responsive
2. Max 10 fingerprints to hold for multiple users
3. E-Key for emergency key and management
4. Zinc alloy panel with elegant design
5. surface mounted, widely used in drawer, cabinet, wardrobe etc.

- 2) Method 2:
Insert the E-KEY and then place the any fingerprint on the sensor, when the green light on, the lock will be unlocked, and all fingerprints will be deleted at the same time.



Note


After initialization, the fingerprints will be deleted and the Morse code will be reset.

3.Low battery alarm

Low battery: The red light flashes when unlocking, please replace the battery in time.
Battery type: 3*AAA alkaline batteries, carbon batteries are prohibited.

4.Emergency power

Can be connected to a power bank or mobile charger (5V single voltage) for external power supply when the power is low. Replace the batteries after unlocking.




Other functions

1.Set the Morse code

(For example, set 456 as the Morse code)

- Place your registered finger on the sensor,until the white light comes on,then release your finger.
- Green light is on,press the sensor continuously for 4 times with any finger,then stop pressing.
- Blue light is on,press the sensor continuously for 5 times with any finger,then stop pressing.
- Yellow light is on,press the sensor continuously for 6 times with any finger,wait for the light to go out.
- The emergency Morse code was changed to 456.

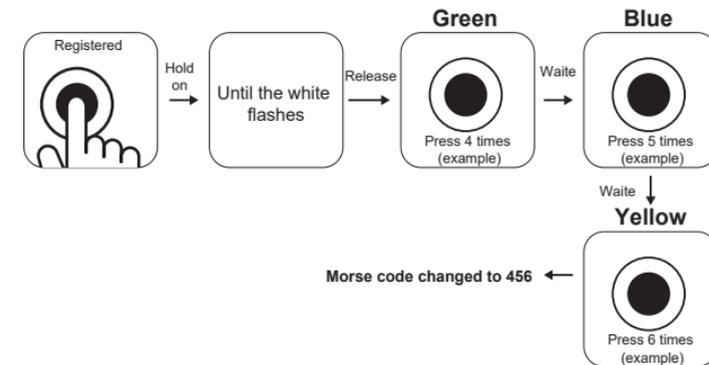

Notes:

- 1)Morse code can only be set after fingerprint registration.The Morse code only supports 3 digits.
- 2)The factory default Morse password is 123.

2. Use Morse code to delete fingerprints


(For example, the Morse code is 456)

→ Placing any finger on the sensor ,until the white light comes on,then release your finger.

→ Green light is on,press the sensor continuously for 4 times with any finger,then stop pressing.

→ Blue light is on,press the sensor continuously for 5 times with any finger,then stop pressing.

→ Yellow light is on,press the sensor continuously for 6 times with any finger,wait for the light to go out.

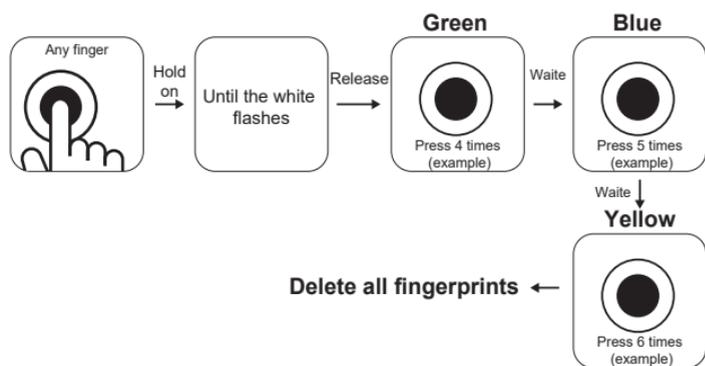


Notes:

This operation will delete all fingerprints, but will not reset the Morse code.


Installation instructions

1. Put the installation drawing on the door, approx 45mm between the door frame and center hole (Picture 1), then drill the hole

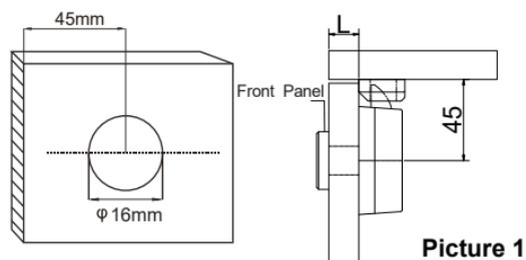


Picture 1

wire connection




	Door Thickness (mm)	Screw
	15mm~17mm	(M2.5×12) X 2
	17mm~19mm	(M2.5×14) X 2
	18mm~20mm	(M2.5×16) X 2

2.The wire goes through the centre hole, then fix the panel by screw ST2.5X12 and washer.Fix the washer to the door panel with screw ST3 X10.Insert connection wire (See Picture 2) into lock body, then fix by screw ST3.5X18.

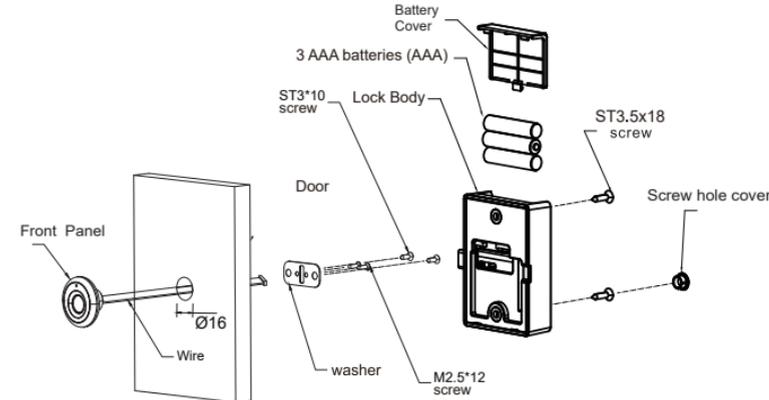


Picture 2

2. Fix the striking plate by screw ST3.5X18 (Make sure latch works well)

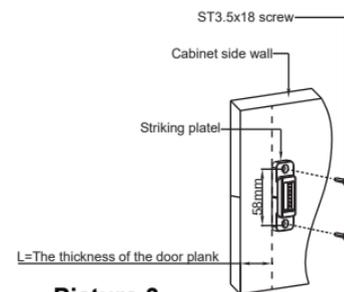


Picture 3

COMPONENT

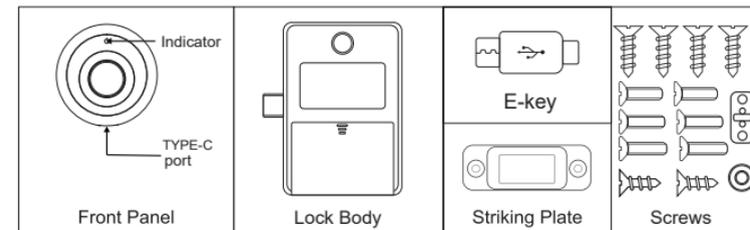

INSTALLATION DRAWING



Follow the drawing to drill the hole