


MODEL: 6-DZM-32



Plane Chart:


Unit:(mm) Terminal type:(D2)

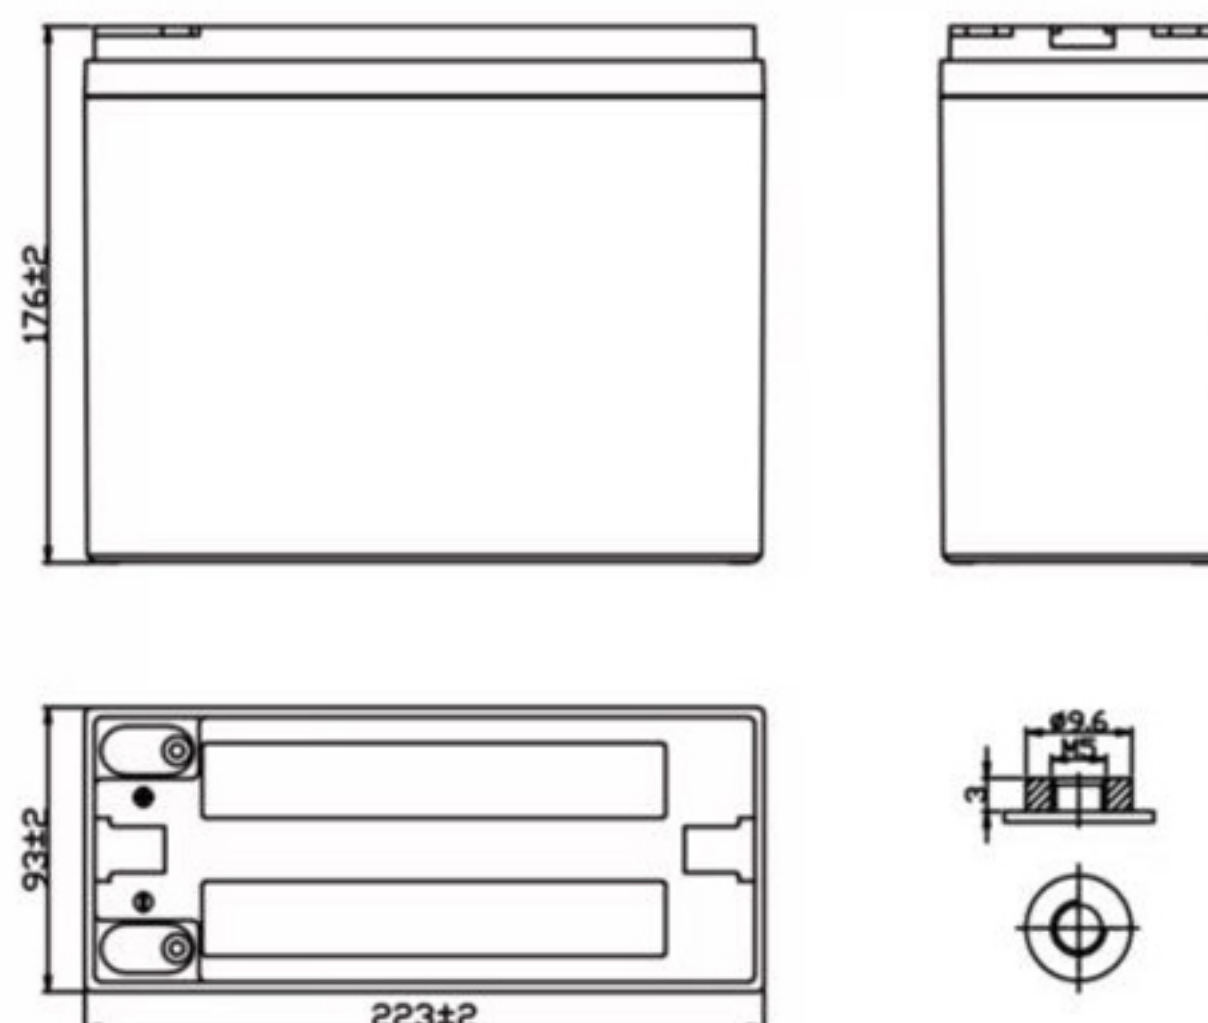


Parameter Chart:

Volts		12V
Capacity(25 °C)	3 hours rate (10.6A)	32Ah
	10 hours rate (3.5A)	35Ah
Capacity Affected By Temperature	40 °C	102%
	25 °C	100%
	0 °C	85%
	-15 °C	70%
Residual Capacity (25 °C)	Capacity After 3 Months Storage	90%
	Capacity After 6 Months Storage	80%
	Capacity After 12 Months Storage	60%
Design cycle service life		4 years
Charge (Constant Voltage)	Cycle (25 °C)	Initial Charging Current Less Than 9.6A Voltage 14.5~14.9V
	Float (25 °C)	Charge Voltage 13.6~13.8V
Internal Resistance	Full Charged Battery 25 °C	11mΩ
Weight (Approx)		9.5Kg

Performance curve

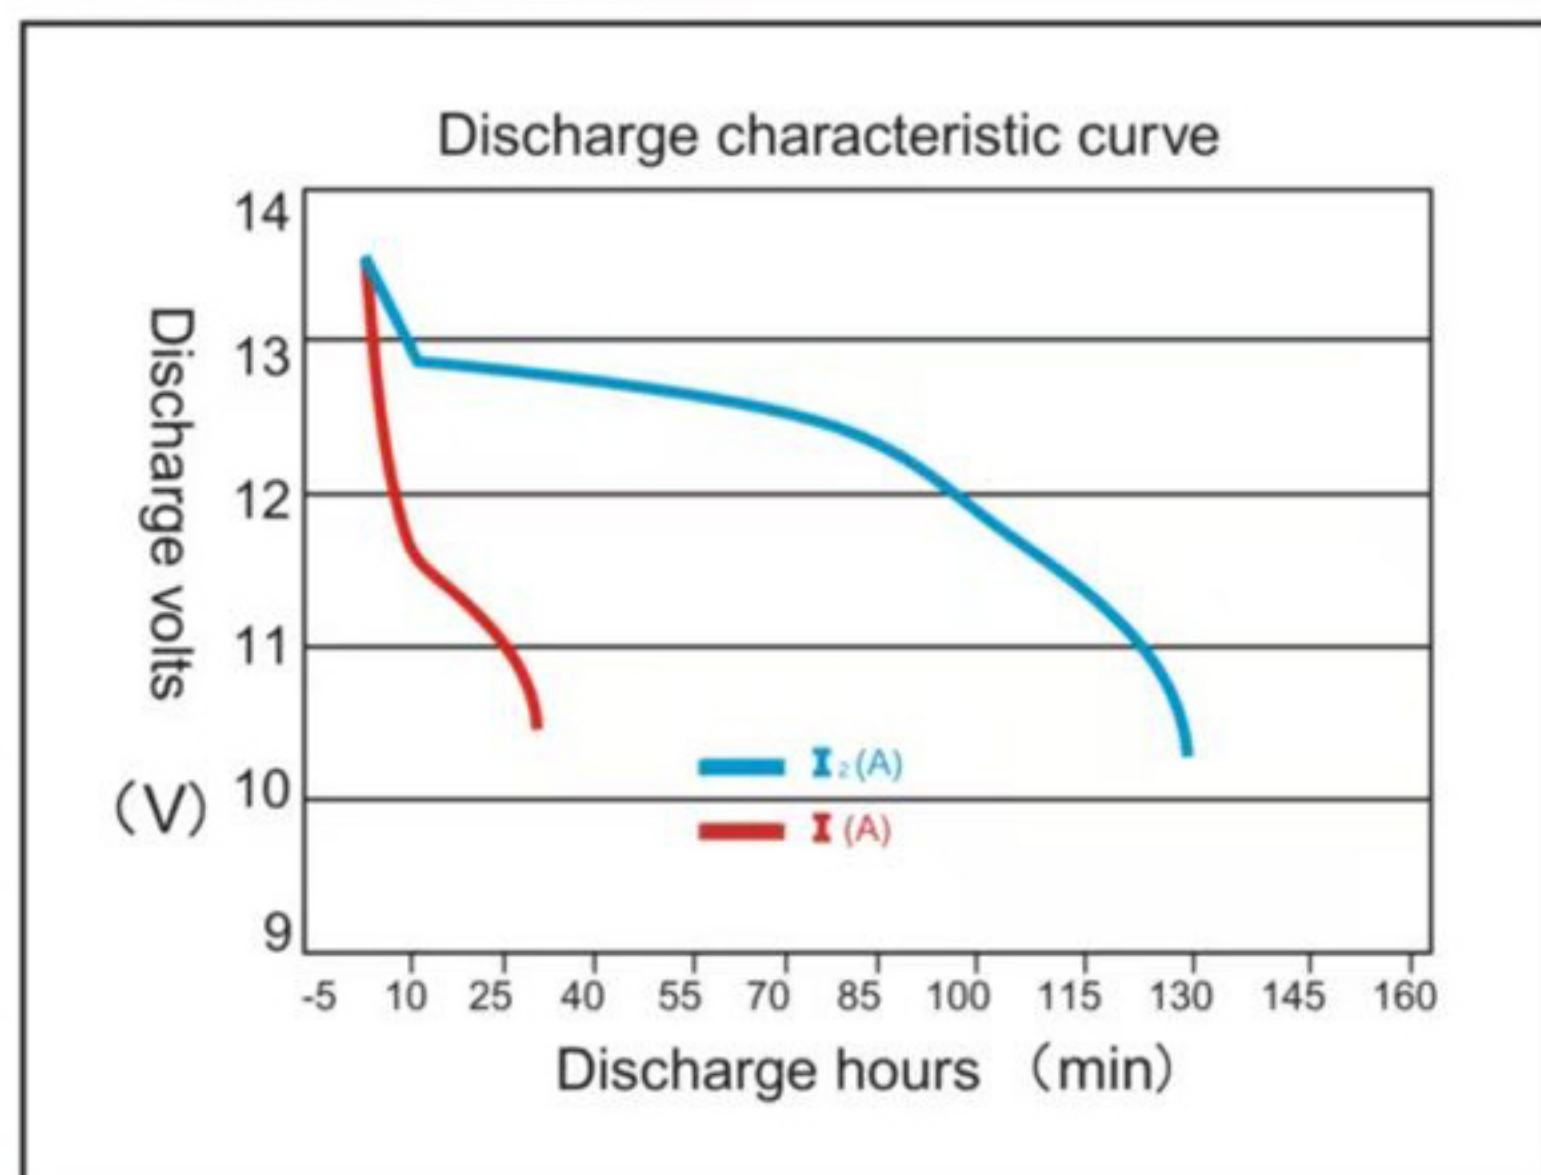

Cycle service life in relation to the depth of discharge

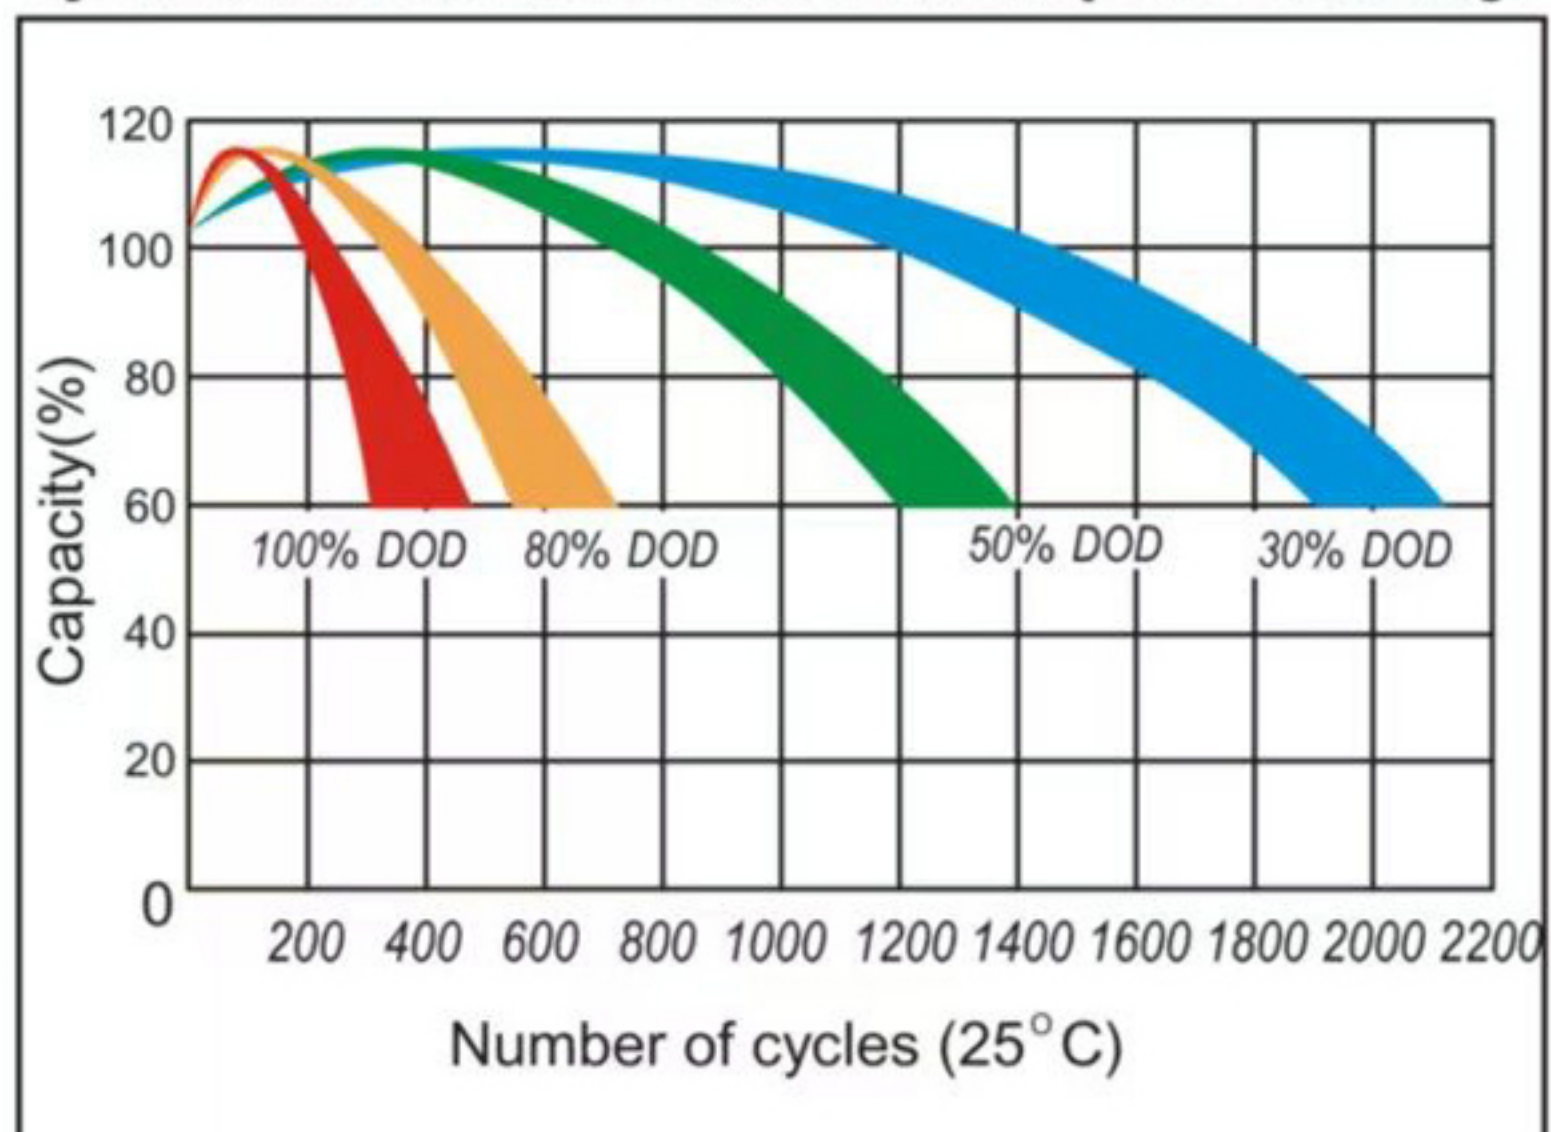

★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.