

12.8V8Ah










LFP Li-ion Battery



Dimension:

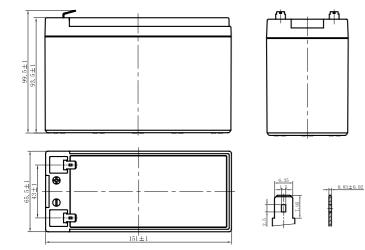

SAFETY

- Cylindrical LiFePO4 cells (26700-4Ah), High consistency, long cycle life and much more safety.
- + UN38.3, CE certification for system. + The cycle life over 2000 times @80%DOD

DESIGN

- ABS container, replace VRLA battery perfectly.
- Fast charge performance.
- -20~+55° C widely temperature range.
- + Maintenance free.

BATTERY MANAGEMENT SYSTEM (BMS)

- Integrated hardware BMS inside.
- Independent protection for charge and discharge.
- Over voltage, low voltage, over temperature and short circuit protection.

Unit: mm





12.8V8Ah

Specification

Model	R-LFP12.8V8Ah
Part Number	8010128000801
Nominal Voltage [V]	12.8
Nominal Capacity [Ah]	8
Total Energy [Wh]	100.8
Max. Charging Current [A]	8
Recommended Charging Current [A]	4
Charging Voltage [V]	14.6
Max. Discharging Current [A]	8
End of Dicharge Voltage [V]	11.2
Pulse Discharge Current	12A @ 10s
Dimension [W*D*H, mm]	151*65*93.5
Weight [Kg]	0.98
Operation Humidity	0~95% RH (No condensing)
Operating Temperature Range	Charge: 0 ~ +50 $^{\circ}$ C; Discharge: -20 ~ +55 $^{\circ}$ C
BMS Protection	Over charge Over discharge, Over temperature, Short circuit
Parallel Support	Yes, Max 2 Sets
Series Support	Yes, Max 4 Sets
Cycle Life	>2000
Designed Calendar Life	>10 Years
Certification	UN38.3, CE, MSDS

1. 80% DOD and to 80% of initial capacity.

The datasheet is subject to change without prior notification

For more information, contact with: sales@ritarpower.com