







25.6V100Ah

LiFePO4 BATTERY



Dimension:

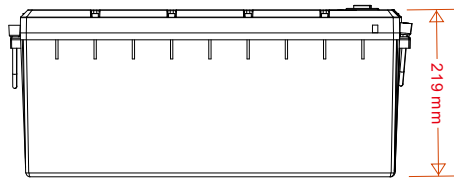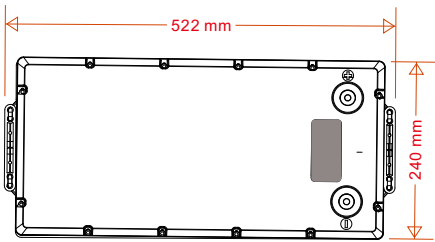

Unit: mm

SAFETY

- + Long life type prismatic LiFePO4 cells.
- + Cell certification: UN38.3, ROHS, IEC62619, UL1973.
- + Battery certification: UN38.3, MSDS.
- + The cycle life over 3500 times.

DESIGN

- + Detachable case, better than traditional case.
- + Case material ABS+PC, better and stronger than ABS case.
- + IP65 Class, water-proof design.
- + Maintenance free.

BATTERY MANAGEMENT SYSTEM

- + Integrated BMS inside.
- + Independent protection for charge and discharge.
- + OVP, LVP, OCP, OTP, LTP, OTP, Short circuit protection.
- + Support LEDs indicators, Heater parts, Blue-tooth module.



25.6V100Ah

SPECIFICATION

Model	LFP25.6V100AH
Nominal Voltage [V]	25.6
Nominal Capacity [Ah]	100
Total Energy [Wh]	2560
Max. Charging Current [A]	100
Recommended Charging Current [A]	50
Charging Voltage [V]	28.4~29.2
Max. Discharging Current [A]	100
End of Dicharge Voltage [V]	22.4
Operating Temperature Range	Charge: 0 ~ +50°C; Discharge: -20 ~ +55°C
Protection	Over charge Over discharge, Over temperature, Low Temperature, Over Current, Short circuit
Cycle Life ⁽¹⁾	>3500 cycles
Designed Calendar Life	10 Years
Dimension (W*D*H, mm)	522*240*219
Weight [Kg]	21.6
Operation Humidity	0~95% RH (No condensing)
Communication Port	/
LED Indicator and Button	/
IP Class	IP65
Parallel Support ⁽²⁾	Yes, Max, 4Sets
Series Support	Yes, Max. 2 Sets
Certification-Cell	UN38.3; ROHS; IEC62619; UL1973;
Certification-Battery	UN38.3; MSDS; CE
Optional Parts	/

Note:
(1) 25°C ,0.5C/0.5C, 100%DOD and 80% EOL
(2) For parallel and series power cable connection, refer to user manual.




BMS Detail Information

Over-Charge Alarm & Protection	
Over-Charge Alarm	3.55V (For cell) 28.4V (For pack)
Over-Charge Protection	3.7V (For cell) 29.6V (For pack)
Over-Charge Protection Delay	1000 ms
Over-Charge Release	3.45V (For cell) 27.6V (For pack)
Over-Discharge Alarm & Protection	
Over-Discharge Alarm	2.8V (For cell) 22.4V (For pack)
Over-Discharge Protection	2.5V (For cell) 20V (For pack)
Over-Discharge Protection Delay	1000 ms
Over-Discharge Release	2.8V (For cell) 22.4V (For pack)
Over Current Alarm & Protection	
Charge Over Current Alarm	105A
Charge Over Current Protection	110A
Charge Over-Current Protection Delay	15S
Charge Over Current Protection Release	Automatic release after 1min and up to 3 times or Discharge
Discharge Over Current Alarm	110A
Discharge Over Current Protection-1	120A
Discharge Over Current Protection-1 Delay	15S
Discharge Over Current Protection-2	180A
Discharge Over Current Protection-2 Delay	200ms
Discharge Over Current Protection Release	Automatic release after 1min and up to 3 times or Charge
Over Temperature Alarm & Protection	
Charge Low Temperature Alarm	7°C
Charge Low Temperature Protection	0°C
Charge Low Temperature Protection Release	5°C
Charge High Temperature Alarm	50°C
Charge High Temperature Protection	55°C
Charge High Temperature Protection Release	45°C
Discharge Low Temperature Alarm	-10°C
Discharge Low Temperature Protection	-20°C
Discharge Low Temperature Protection Release	-17°C
Discharge High Temperature Alarm	55°C
Discharge High Temperature Protection	60°C
Discharge High Temperature Protection Release	50°C
Short Circuit Protection	
Short Current Protection Delay Time	1500 uS
Short Current Release Method	Release load
Heater Control (for optional heater parts)	
Heater ON	Cell temperatures≤ 0°C and charger is connected
Heater OFF	Cell temperature >10°C



25.6100Ah

INTERNAL STRUCTURE DIAGRAM

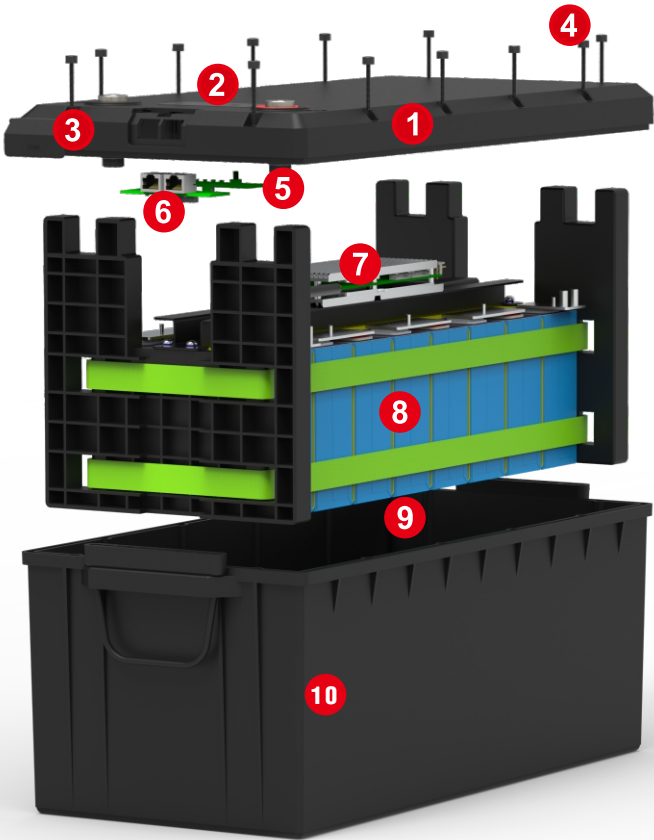

- ① Detachable cover-ABS+PC
- ② PC Film
- ③ Communication port cover (Only for G3)
- ④ Hexagon socket screws
- ⑤ ON/OFF button and LEDs (Only for G2,G3)
Optional Bluetooth Module
- ⑥ Communication board (Only for G3)
- ⑦ BMS (RD-RJ8S100A)
- ⑧ Cells, 1P8S
- ⑨ Heater Parts (200W, Optional)
- ⑩ Case : ABS+PC

Optional Parts: Bluetooth module & APP

