

OPzV12-140(12V140Ah)



OPzV series is Valve Regulated Lead Acid battery that adopts immobilized GEL and Tubular Plate technology to offer high reliability and performance. The Battery is designed and manufactured according to DIN standards and with die-casting positive grid and patented formula of active material OPzV series exceeds DIN standard values with more than 20 years floating design life at 25°C and It is the best solution for cyclic use under extreme operating conditions.




Specification

Cells Per Unit	6
Voltage Per Unit	12V
Nominal Capacity	140Ah@10hour-rate to 1.80V per cell @25°C
Weight	Approx. 52.8Kg (Tolerance±5%)
Internal Resistance	≤7.0 mΩ (Full Charge Condition @25°C)
Terminal	Default F12(M8)
Max. Discharge Current	1400A (5 sec)
Design Life	20 years
Max. Charging Current	28.0 A
Reference Capacity	C ₃ 105.0Ah C ₅ 119.0Ah C ₁₀ 140.0Ah C ₂₀ 150.0Ah
Float Charging Voltage	13.6 V~13.8 V @ 25°C Temperature Compensation: -3mV/°C/Cell
Cycle Use Voltage	14.2 V~14.4 V @ 25°C Temperature Compensation: -4mV/°C/Cell
Operating Temperature Range	Discharge: -40°C~60°C Charge: 0°C~50°C Storage: -40°C~60°C
Normal Operating Temperature Range	25°C±5°C
Self Discharge	RITAR Valve Regulated Lead Acid (VRLA) batteries can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly Self-discharge ratio is less than 2% at 20°C. Please charged batteries before using.
Container Material	A.B.S. UL94-HB, UL94-V0 Optional.

Dimensions

Unit: mm

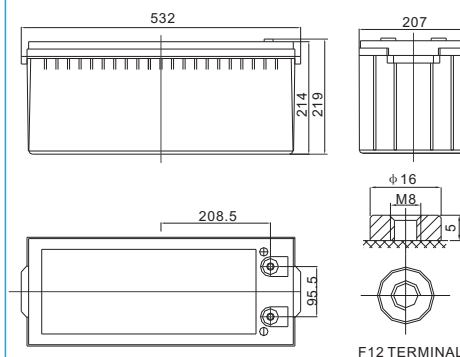

Length	532±1mm (20.9 inches)
Width	207±1mm (8.15 inches)
Height	214±1mm (8.43 inches)
Total Height	219±1mm (8.62 inches)
Torque Value	10~12 N*m

Constant Current Discharge Characteristics : A(25°C)

F.V/ Time	30MIN	45MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	107.5	88.7	76.1	50.5	37.7	30.0	25.3	17.5	14.7	7.72
1.65V	103.7	86.4	74.9	49.8	37.2	29.6	25.1	17.4	14.6	7.64
1.70V	99.1	83.4	73.0	49.0	36.5	29.1	24.6	17.1	14.4	7.57
1.75V	92.6	79.0	69.9	47.7	35.8	28.7	24.4	16.9	14.3	7.50
1.80V	86.1	74.8	67.2	46.2	35.0	28.0	23.8	16.7	14.0	7.35
1.85V	76.7	66.7	60.1	42.1	32.2	25.9	22.1	15.5	13.2	6.91

Constant Power Discharge Characteristics : W/Cell(25°C)

F.V/ Time	30MIN	45MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	189.5	158.9	137.9	94.8	71.8	57.5	48.9	34.1	28.8	15.2
1.65V	185.1	156.6	137.0	94.0	71.3	57.1	48.5	33.9	28.5	15.1
1.70V	179.3	152.8	134.8	92.9	70.2	56.3	47.9	33.5	28.3	15.0
1.75V	169.7	146.2	130.3	91.0	69.1	55.7	47.5	33.3	28.1	14.8
1.80V	159.8	139.8	126.4	88.5	67.8	54.6	46.6	32.8	27.7	14.6
1.85V	144.1	126.1	114.0	81.1	62.6	50.7	43.4	30.7	26.1	13.7


(Note) The above characteristics data are average values obtained within three charge/discharge cycle not the minimum values.

The battery must be fully charged before the capacity test. The C₁₀ should reach 95% after the first cycle and 100% after the third cycle.


OPzV12-140(12V140Ah)




Discharge Characteristics Curve

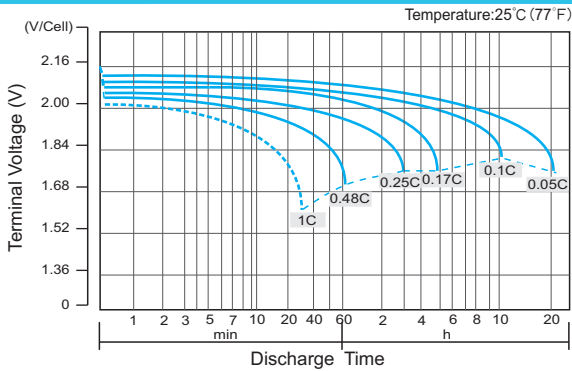


Charge Characteristic Curve for Cycle Use(IUU)

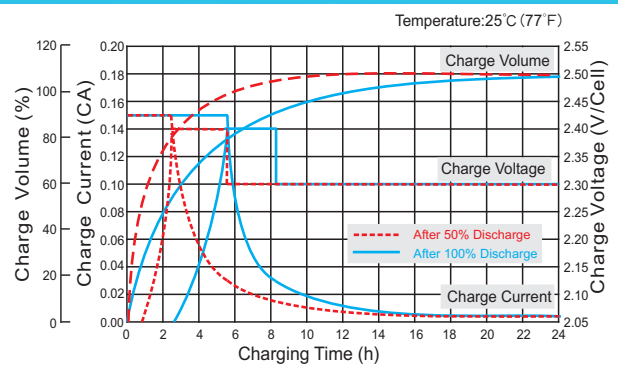


Cycle Life in Relation to Depth of Discharge

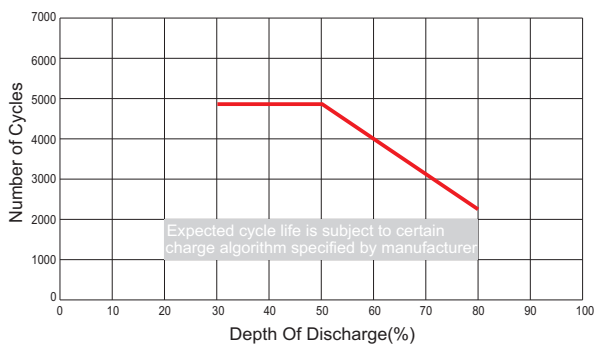


Relationship Between Charging Voltage and Temperature

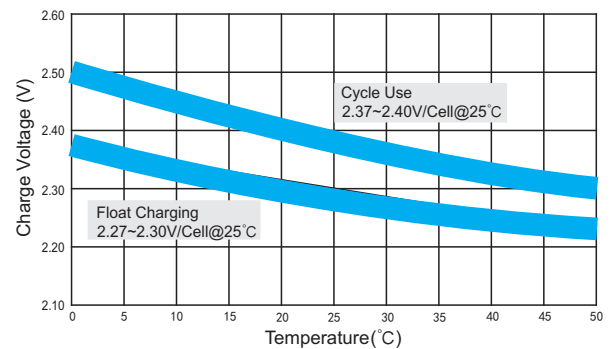


Temperature Effects on Capacity

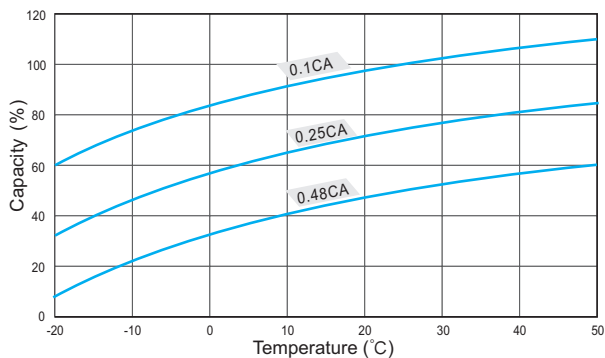


Storage Characteristics

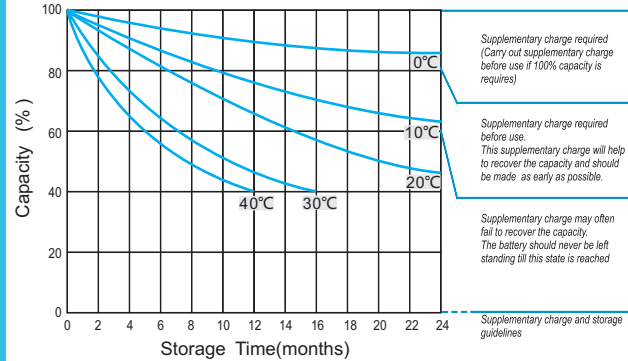

Effect of Temperature on Long Term Life

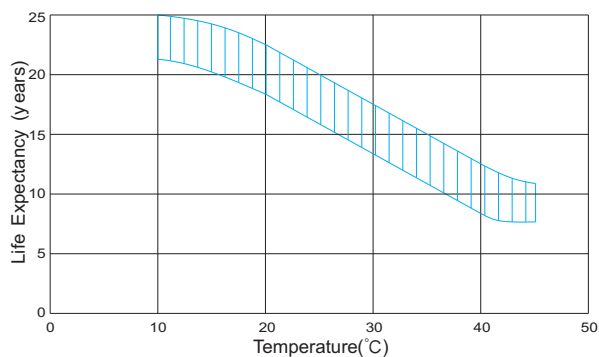

Relationship of OCV And State of Charge(20°C)

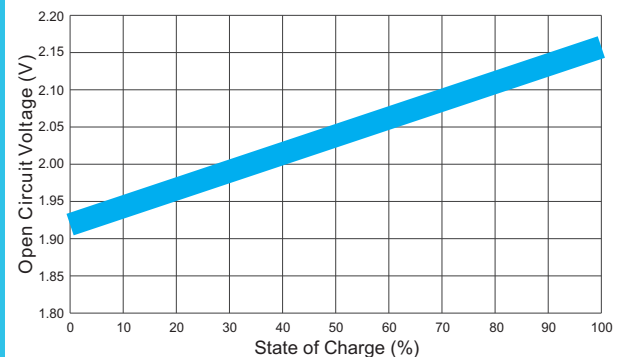

(Note) All above information shall be changed without prior notice, RITAR reserves the right to explain and update the latest information.