

OPzV2-1500(2V1500Ah)



OPzV series is Valve Regulated Lead Acid battery that adopts immobilized GEL and Tubular Plate technology to offer high reliability and performance. The Battery is designed and manufactured according to DIN standards and with die-casting positive grid and patented formula of active material OPzV series exceeds DIN standard values with more than 25 years floating design life at 25°C and It is the best solution for cyclic use under extreme operating conditions.




Specification

Cells Per Unit	1
Voltage Per Unit	2V
Nominal Capacity	1500Ah@10hour-rate to 1.80V per cell @25°C
Weight	Approx. 102.0Kg (Tolerance ± 5%)
Internal Resistance	≤0.45 mΩ (Full Charge Condition @25°C)
Terminal	Default F10(M8)
Max. Discharge Current	4500A (5 sec)
Design Life	25 years
Max. Charging Current	300.0 A
Reference Capacity	C ₃ 1125.0Ah C ₅ 1275.0Ah C ₁₀ 1500.0Ah C ₂₀ 1606.0Ah
Float Charging Voltage	2.27 V~2.30 V @ 25°C Temperature Compensation: -3mV/°C/Cell
Cycle Use Voltage	2.37 V~2.40 V @ 25°C Temperature Compensation: -4mV/°C/Cell
Operating Temperature Range	Discharge: -40°C~60°C Charge: 0°C~50°C Storage: -40°C~60°C
Normal Operating Temperature Range	25°C ± 5°C
Self Discharge	RITAR Valve Regulated Lead Acid (VRLA) batteries can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly Self-discharge ratio is less than 2% at 20°C. Please charged batteries before using.
Container Material	A.B.S. UL94-HB, UL94-V0 Optional.

Dimensions

Unit: mm

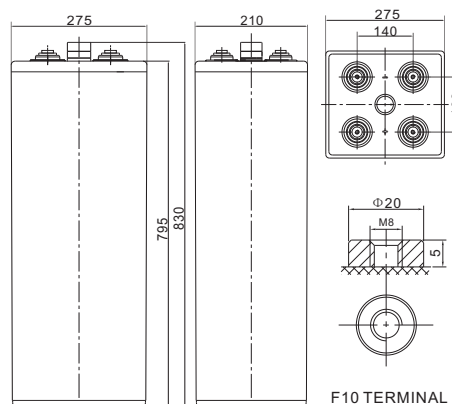

Length	275±2mm (10.8 inches)
Width	210±2mm (8.27 inches)
Height	795±2mm (31.3 inches)
Total Height	830±2mm (32.7 inches)
Torque Value	10~12 N*m

Constant Current Discharge Characteristics : A(25°C)

F.V/ Time	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR	24HR	48HR	72HR	100HR
1.60V	815.0	530.7	403.5	321.0	271.5	187.5	157.5	82.7	70.9	37.4	26.3	19.7
1.65V	802.1	523.3	399.0	317.4	268.5	186.0	156.0	81.9	70.2	37.1	25.8	19.5
1.70V	781.9	514.5	391.5	311.8	264.0	183.0	154.5	81.1	69.5	36.7	25.5	19.3
1.75V	748.8	501.3	384.0	307.1	261.0	181.5	153.0	80.3	68.9	36.3	25.3	19.1
1.80V	720.0	485.1	375.0	300.0	255.0	178.5	150.0	78.8	67.5	35.6	24.8	18.8
1.85V	643.7	442.5	345.0	277.5	237.0	166.5	141.0	74.0	63.5	33.5	23.3	17.6

Constant Power Discharge Characteristics : W/Cell(25°C)

F.V/ Time	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR	24HR	48HR	72HR	100HR
1.60V	1419	975.8	769.1	616.6	524.1	365.5	308.0	163.1	138.6	73.2	51.3	38.5
1.65V	1409	967.2	763.5	612.0	520.1	363.6	305.9	161.8	137.6	72.6	50.6	38.2
1.70V	1386	955.8	752.1	603.3	513.1	358.7	303.7	160.5	136.7	72.1	50.2	38.0
1.75V	1340	936.0	740.5	596.4	509.0	356.8	301.5	159.1	135.7	71.6	49.8	37.7
1.80V	1300	910.4	725.9	584.7	499.0	351.9	296.3	156.2	133.3	70.4	49.0	37.0
1.85V	1173	834.6	670.4	542.8	465.4	329.1	279.2	147.0	125.7	66.3	46.2	34.9


(Note) The above characteristics data are average values obtained within three charge/discharge cycle not the minimum values.

The battery must be fully charged before the capacity test. The C₁₀ should reach 95% after the first cycle and 100% after the third cycle.


OPzV2-1500(2V1500Ah)




Discharge Characteristics Curve

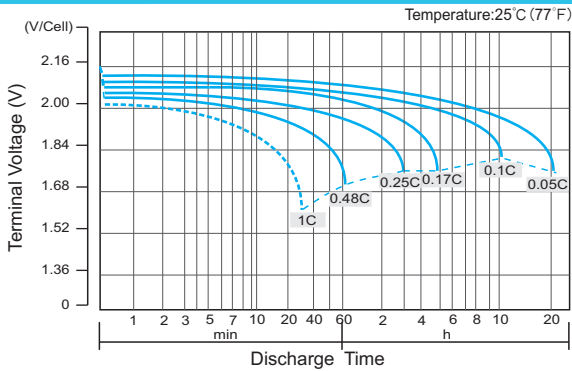


Charge Characteristic Curve for Cycle Use(IUU)

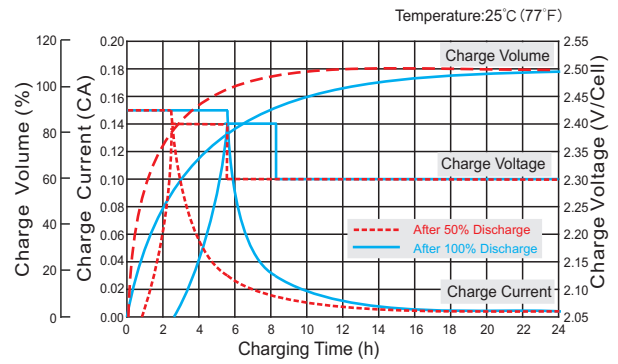


Cycle Life in Relation to Depth of Discharge

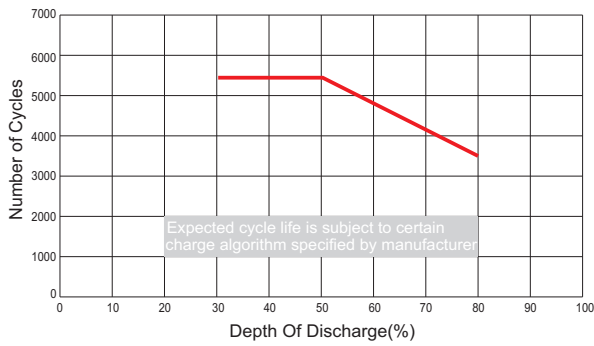


Relationship Between Charging Voltage and Temperature

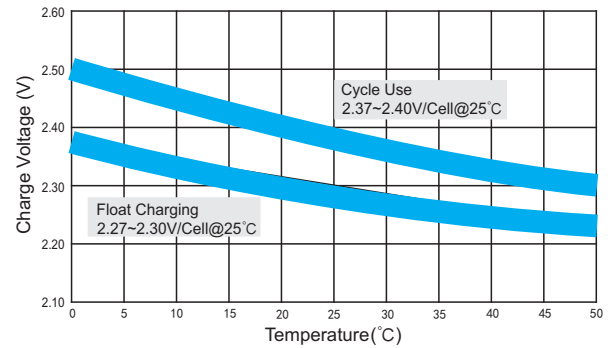


Temperature Effects on Capacity

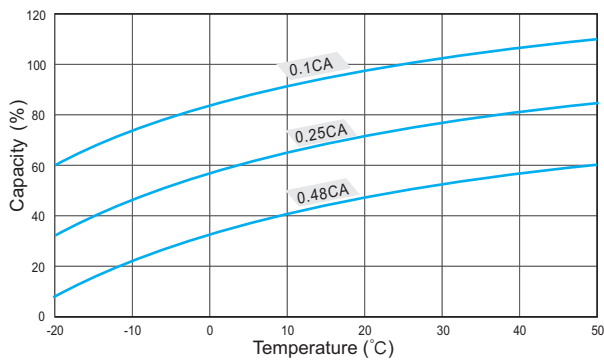


Storage Characteristics

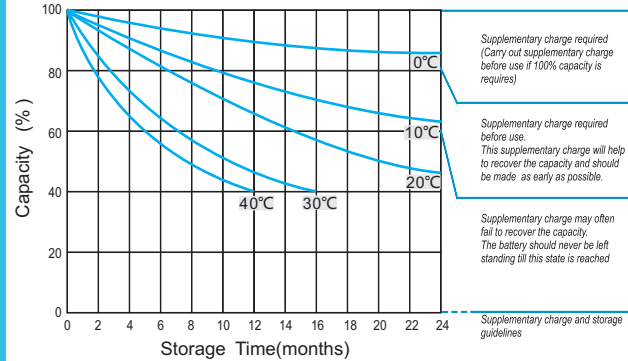

Effect of Temperature on Long Term Life

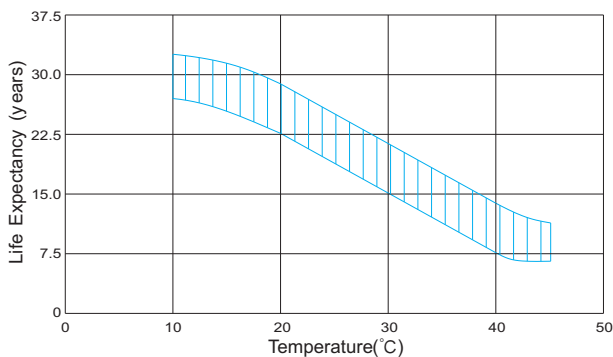

Relationship of OCV And State of Charge(20°C)

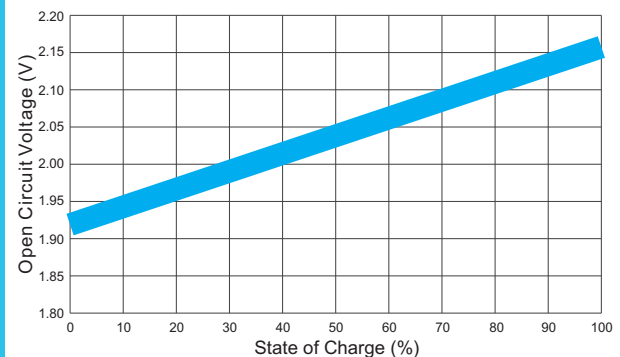

(Note) All above information shall be changed without prior notice, RITAR reserves the right to explain and update the latest information.