




TAB LI-ION BATTERIES



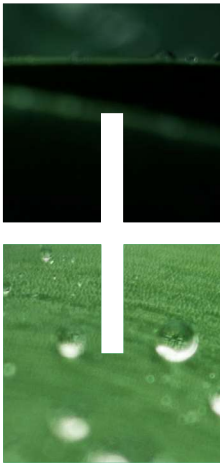

TAB MONOBLOCK LI-ION BATTERIES

TAB Monoblock Li-Ion Batteries are ideal for applications where long lifespan, light weight, higher power, fast charging and safety are key. They can be used in a variety of stationary and motive power applications.

Batteries are protected against overcharging, deep discharging and overheating and can be a straightforward replacement for most lead-acid batteries.

MAIN FEATURES



- **LONGER CYCLE LIFE:** Offers up to 20 times longer cycle life and five times longer float/calendar life than lead acid battery, helping to minimize replacement cost and reduce total cost of ownership .
- **LIGHTER WEIGHT:** About 40% of the weight of a comparable lead acid battery. A 'drop in' replacement for lead acid batteries.
- **HIGHER POWER:** Delivers twice power of lead acid battery, even high discharge rate, while maintaining high energy capacity.
- **WIDER TEMPERATURE RANGE:** -20°C~ 60°C.
- **SUPERIOR SAFETY:** Lithium Iron Phosphate chemistry eliminates the risk of explosion or combustion due to high impact, overcharging or short circuit situation.

APPLICATION



- Solar & storage systems
- UPS, back power
- Telecommunications
- Lightning
- Golf Cars
- Wheelchairs
- Toys
- Marine and RV
- Cleaning Machines



T A B M O N O B L O C K L I - I O N B A T T E R I E S

TAB Monoblock Li-Ion Batteries								
Code	V	Ah	Wh	Dimensions (mm)			Weight	
				L	W	H	Kg	Terminal
HD 6.4-4.5	6,4	4,5	28,8	70	47	101	0,34	F1
HD 12-4.5	12,8	4,5	57,6	90	70	101	0,75	F1
HD 12-7.5	12,8	7,5	96	151	65	94	1,10	F1
HD 12-12	12,8	12	153,6	152	99	96	1,70	F2
HD 12-18	12,8	18	230,4	181	77	167	2,70	M5
HD 12-20	12,8	20	256	181	77	167	3,00	M5
HD 12-26	12,8	26	332,8	166	175	125	4,20	M5
HD 12-33	12,8	33	422,4	195	130	180	4,80	M6
HD 12-40	12,8	40	512	197	165	170	5,75	M6
HD 12-45	12,8	45	576	197	165	170	7,52	M6
HD 12-50	12,8	50	640	257	132	200	8,12	M6
HD 12-55	12,8	55	704	228	138	228	8,12	M6
HD 12-60	12,8	60	768	228	138	228	8,82	M6
HD 12-65	12,8	65	832	259	168	208	9,30	M6
HD 12-75	12,8	75	960	259	168	208	10,80	M6
HD 12-80	12,8	80	1024	259	168	208	10,80	M6
HD 12-100	12,8	100	1280	330	173	212	13,60	M8
HD 12-150	12,8	150	1920	483	170	238	16,50	M8
HD 12-200	12,8	200	2560	522	240	224	29,60	M8
HD 12-250	12,8	250	3200	522	240	224	29,60	M8
HD 12-300	12,8	300	3840	522	268	224	29,60	M8
HD 12-16	12,8	16	204,8	168	128	75	2,20	T bar
HD 12-18	12,8	18	230,4	181	77	167	3,00	T bar
HD 12-22	12,8	22	281,6	168	128	126	3,00	T bar
HD 24-6	25,6	6	153,6	152	99	96	1,70	F2
HD 24-9	25,6	9	230,4	181	77	167	2,80	M5
HD 24-50	25,6	50	1280	330	173	212	13,60	M8
HD 24-75	25,6	75	1920	483	170	238	16,50	M8
HD 24-100	25,6	100	2560	522	240	224	29,60	M8
HD 24-125	25,6	125	3200	522	240	224	29,60	M8
HD 24-150	25,6	150	3840	522	268	224	29,60	M8

PURE ENERGY, MAXIMUM POWER

