


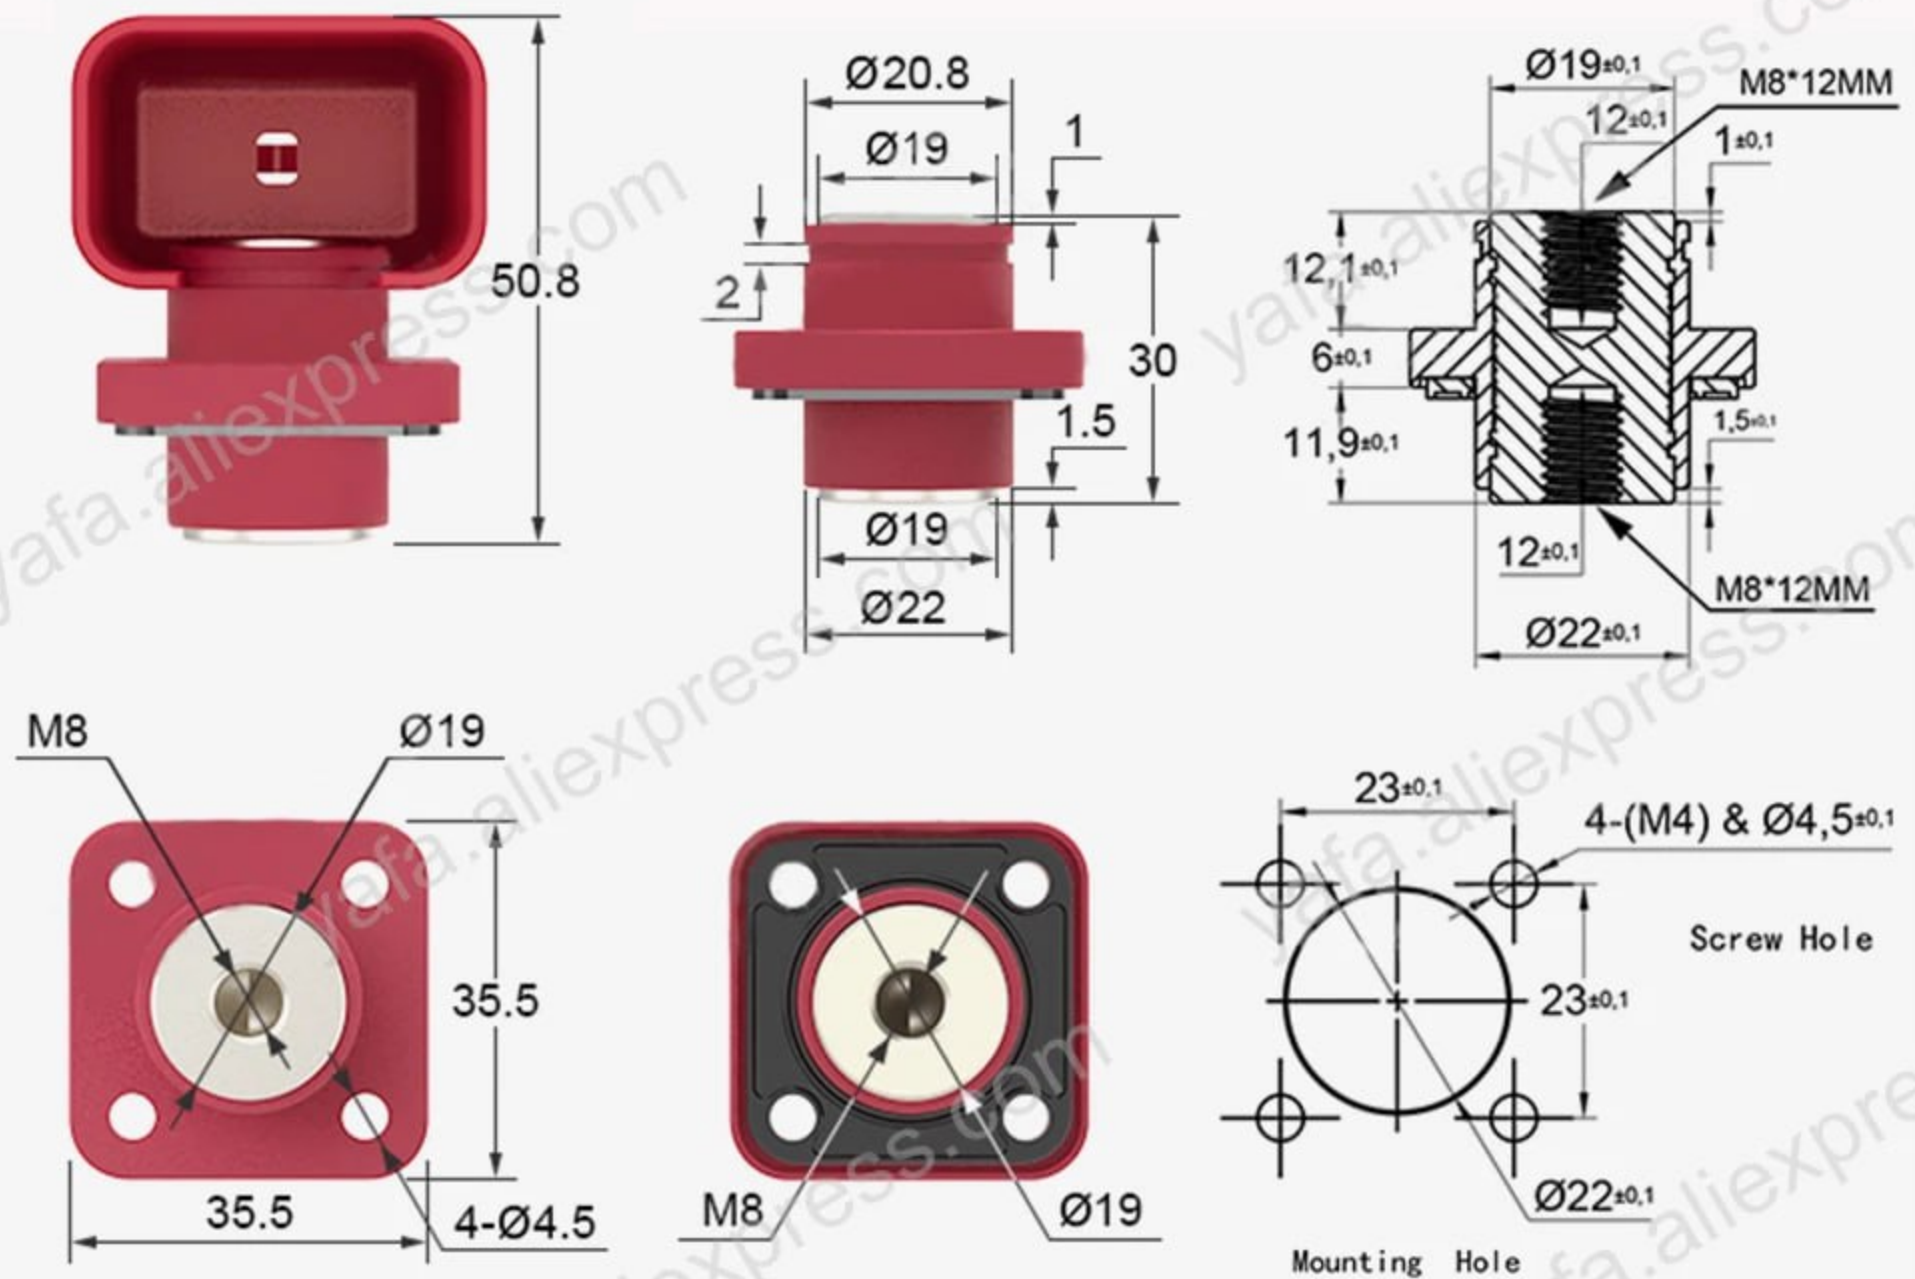

Note: the above dimensions are in millimetres (mm)

Product model: YF-FM8-3530-200A-C	Dielectric strength: 3000V
Material: PA66/H62 BRASS(Nickel Plated)	Mounting Hole Dimension: $\text{Ø}22 - \text{Ø}4.5 \times 4 (23 \times 23 \text{mm})$
Current: 200A	Screw Hole Diameter: Thread inner diameter M8(Up)/M8(Down)
Voltage: 0~1000V DC	Mounting screws: M4
Colour: Red/Black	Flammability Rating: UL 94 V-0